


AUTOMATIK SERIES

Residential

Specific characteristics of this series:

- ✓ Vacuum both dry and liquid substances.
- ✓ Drains automatically into your sanitary piping.
- ✓ No bag to change, no bucket to empty, everything is done automatically!
- ✓ Adapts easily to your needs: low tank and split versions available.
- ✓ Lifetime warranty casing.

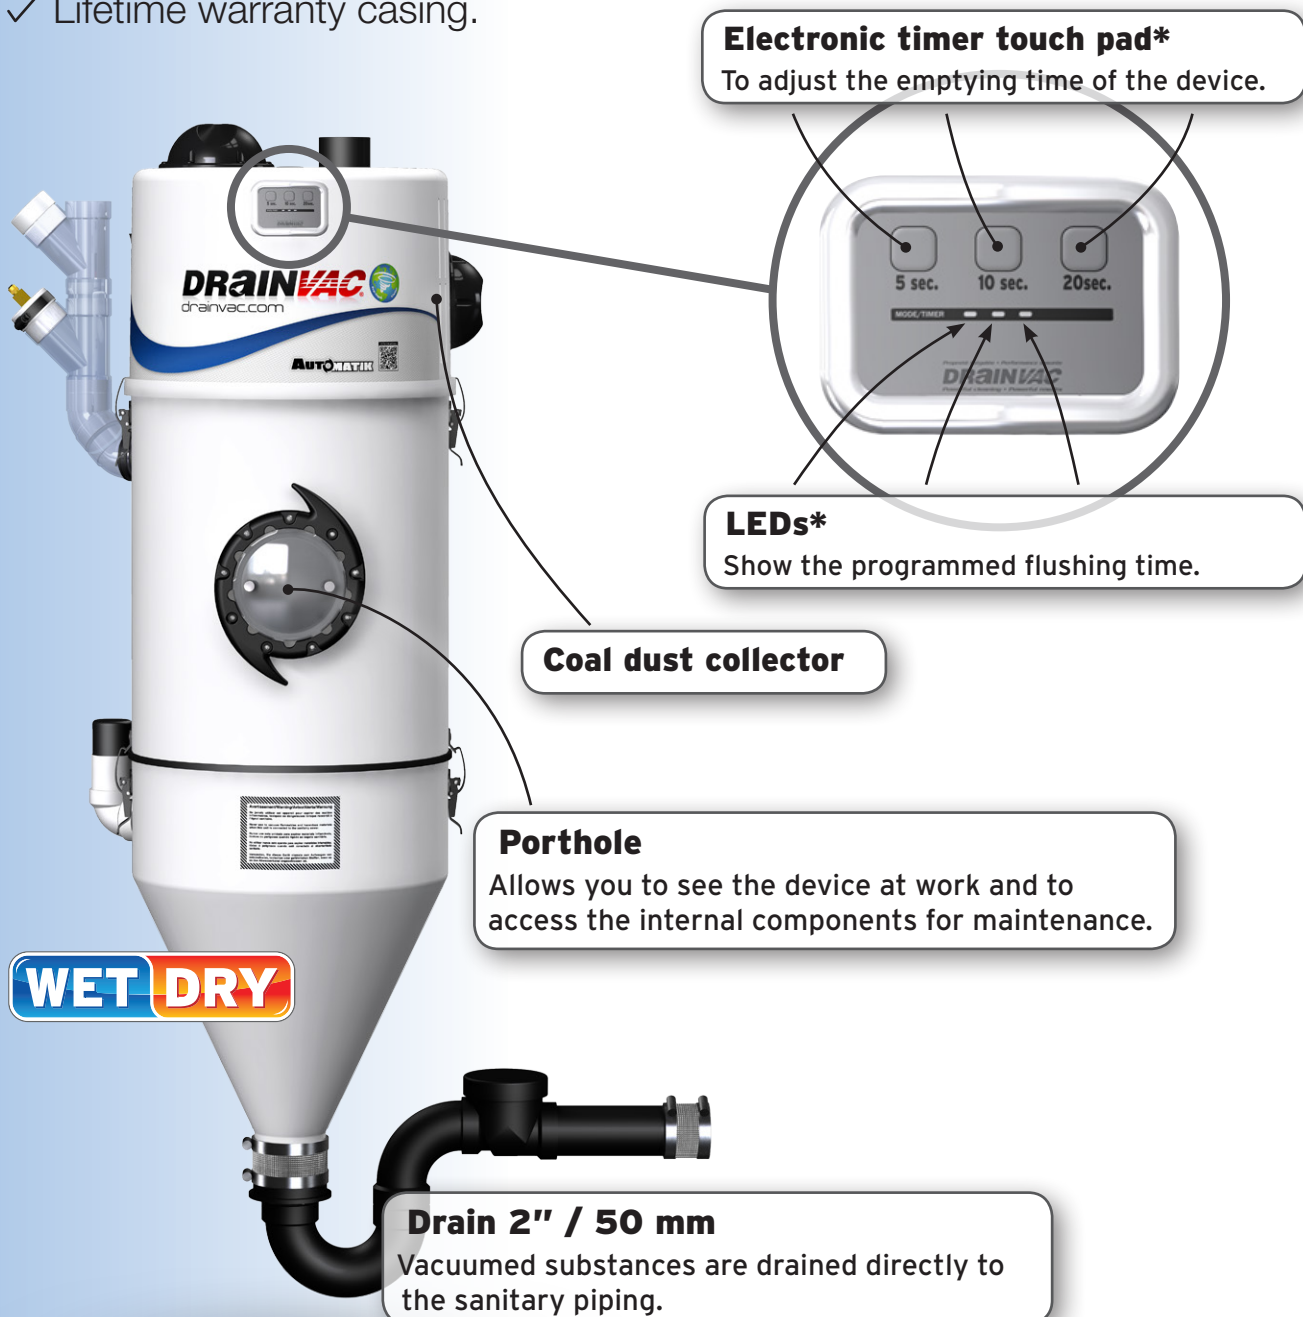

* For more information on the functioning of the membrane (touch pad and LEDs), please refer to the manual supplied with the unit.

AUTOMATIK SERIES



Residential

Several possible configurations:

Split option

- Allows to position the motor in a different room for less noise.
- In case of insufficient space in height, the head may be positioned at the bucket height.

Model DF1A150 shown

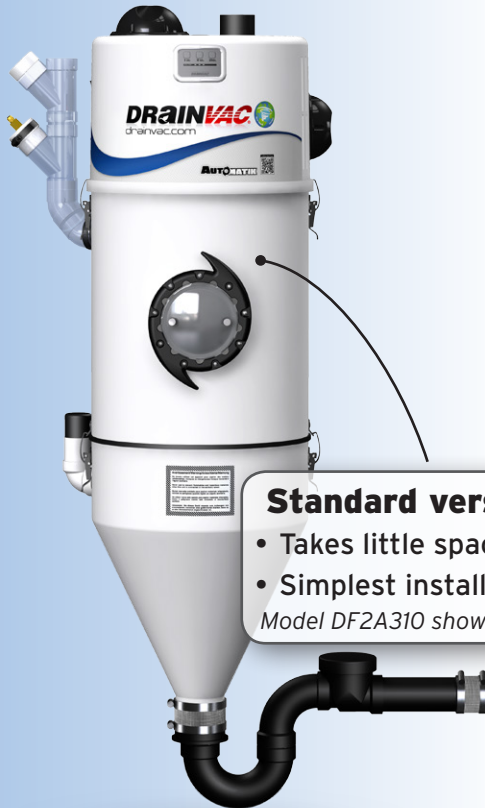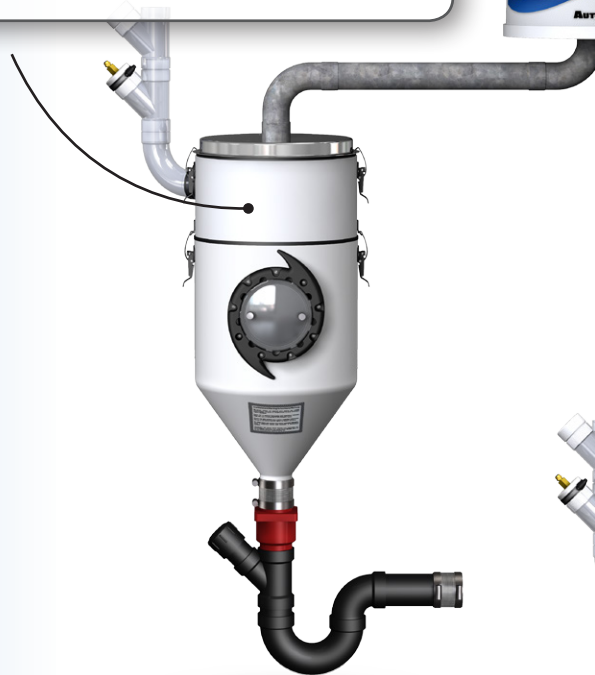

Standard version

- Takes little space
- Simplest installation configuration

Model DF2A310 shown



Lower tank option

- For increased easy maintenance
- To recover oversized materials, the accumulation of hair, animal hair, etc.

Model DF1A150 shown

AUTOMATIK SERIES

Residential

DF1A150

This model is available with a lower tank (DF1A150-CB) or with a split motor head (DF1A150-SP)

- Automatic self-flushing central vacuum system
- Outdoor exhaust required
- 6' (1.8 m) electrical cord
- Lifetime warranty casing



TECHNICAL DATA VALUES

UNIT

AIRWATTS	700
mmH ₂ O	3605
m ³ /h	315
DECIBEL	66 dB at 10' / 66 dB at 3 m
VOLTAGE	230
WATTS	2024
HEIGHT	37" / 93 cm
DIAMETER	12" / 30 cm
CAPACITY	4 gal. / 18 L
WEIGHT	24 lb / 11 kg
BREAKER	10 A
DRAIN	2" / 50 mm

MOTOR

MOTOR CODE	MOTE-48
QUANTITY	1
DIAMETER	5.7" / 14 cm
STAGES	2
FANS	8
AMPS	8.8

CE Certified Product

The muffler and the exhaust vent are included with this unit.

All illustrations, specifications, colors and photographs shown may vary. The power values may vary. These are calculated according to the voltage used in the factory and in accordance to the supplier's technicalities. While Drainvac takes care to ensure that the information contained in this publication is accurate, it cannot guarantee complete accuracy. Drainvac is not responsible for errors or omissions contained in this publication.

AUTOMATIK SERIES

Residential

DF2A310

This model is available with a lower tank (DF2A310-CB) or with a split motor head (DF2A310-SP)

- Automatic self-flushing central vacuum system
- Outdoor exhaust required
- 6' (1.8 m) electrical cord
- Lifetime warranty casing



TECHNICAL DATA VALUES

UNIT

AIRWATTS	2 x 355
mmH ₂ O	4191
m ³ /h	198
DECIBEL	70 dB at 10' / 70 dB at 3 m
VOLTAGE	230
WATTS	2484
HEIGHT	49" / 122.5 cm
DIAMETER	15" / 38 cm
CAPACITY	6 gal. / 29 L
WEIGHT	49 lb / 22 kg
FUSE	15 A
DRAIN	2" / 50 mm

MOTOR

MOTOR CODE	MOTE-14
QUANTITY	2 in series
DIAMETER	5.7" / 14 cm
STAGES	2
FANS	8
AMPS	10.8

CE Certified Product

The muffler and the exhaust vent are included with this unit.

All illustrations, specifications, colors and photographs shown may vary. The power values may vary. These are calculated according to the voltage used in the factory and in accordance to the supplier's technicalities. While Drainvac takes care to ensure that the information contained in this publication is accurate, it cannot guarantee complete accuracy. Drainvac is not responsible for errors or omissions contained in this publication.